


**Code: KMPTF2D/E**

TF2/E is ideal for cutting flexible hydraulic hoses up to 2" four spirals and 1" 1/2 six spirals.

**MAIN FEATURES**

- Ø 250 mm serrated blade;
- Manual operation;
- Recessed blade and guards for the operator's safety.

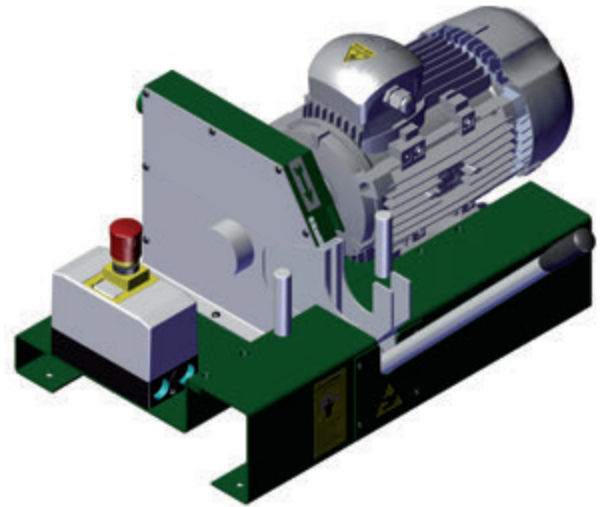


◀ CUTTING AREA

**TECHNICAL DATA**

6 SPIRALS	1" 1/2
4 SPIRALS	2"
2 BRAIDS	2"
MAX Ø	75 mm (2.953")
REVOLUTIONS/MINUTE	2900
BLADE Ø	250 mm (9.843")
STANDARD VOLTAGE	400V 50HZ 3PH
DIMENSIONS LxWxH	650x700x420 mm (25.590"x27.559"x16.535")
WEIGHT	44 kg (97 Lbs)
MOTOR POWER	3Kw (4 Hp)

**INCLUDED ACCESSORIES**

SAFETY PROTECTIONS	
SUCTION CONNECTION	

**OPTIONAL**

CENTRING DEVICE + METER COUNTER (MAX 2")



SPECIAL VOLTAGES AVAILABLE



Product specifications could be modified without prior notice.