



# KRIMPATIC H135 EL


CRIMPING (STANDARD VOLUME CRIMPING)

**Code: KMPH135EL**

*Krimpmatic H135 EL is ideal for crimping hydraulic hoses up to 2" six spirals and up to 3" industrial hose.*

**MAIN FEATURES**

- Ideal for crimping any type of fitting;
- Electronic device for managing the new electro-mechanical panel;
- Warning LED for possible anomalies in the system;
- Settable re-opening time after crimping;
- Settable crimping time.

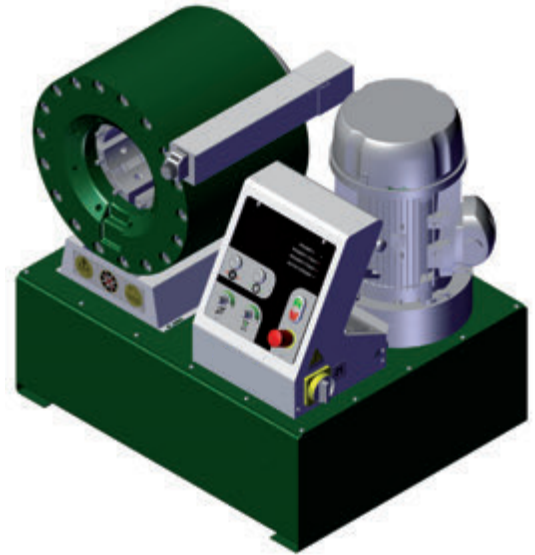

◀ **ELECTRO-MECHANICAL CONTROL WITH ELECTRONIC DEVICE**

TECHNICAL DATA	
CRIMPING FORCE	315 TON (345 US TONS)
6 SPIRALS 2 PIECES	2"
INDUSTRIAL HOSE 2 PIECES	3"
MAX Ø	120 mm (4.724")
CRIMPING/HOUR	865
DIE OPENING	Ø + 43 mm (Ø + 1.693")
90° FITTINGS	2"
STANDARD VOLTAGE	375V-420V 50HZ 3PH
MOTOR POWER	5.5 Kw (7.5 Hp) - A= 10,64
DIMENSIONS LxWxH	820x660x820 mm (32.283"x25.984"x32.283")
WEIGHT WITHOUT OIL	470 kg (1036 Lbs)
OIL	110 Lt.

INCLUDED ACCESSORIES	
ELECTRO-MECHANICAL CONTROL WITH ELECTRONIC DEVICE	
VERNIER DIAL	

OPTIONAL	
DISPENSER + PATENTED QUICK CHANGE	
BASE	
ELECTRIC PEDAL	
MARKING DIES (15 CHAR.)	
SPECIAL DIES	
BACK MIRROR	
CLEANING AND MAINTENANCE KIT	
SPECIAL VOLTAGES AVAILABLE	

WITH SPECIAL DIES Ø 104 MM UPON REQUEST | THEORETICAL WITH 1/2" Δ Ø 6 MM HOSE  
Product specifications could be modified without prior notice.